
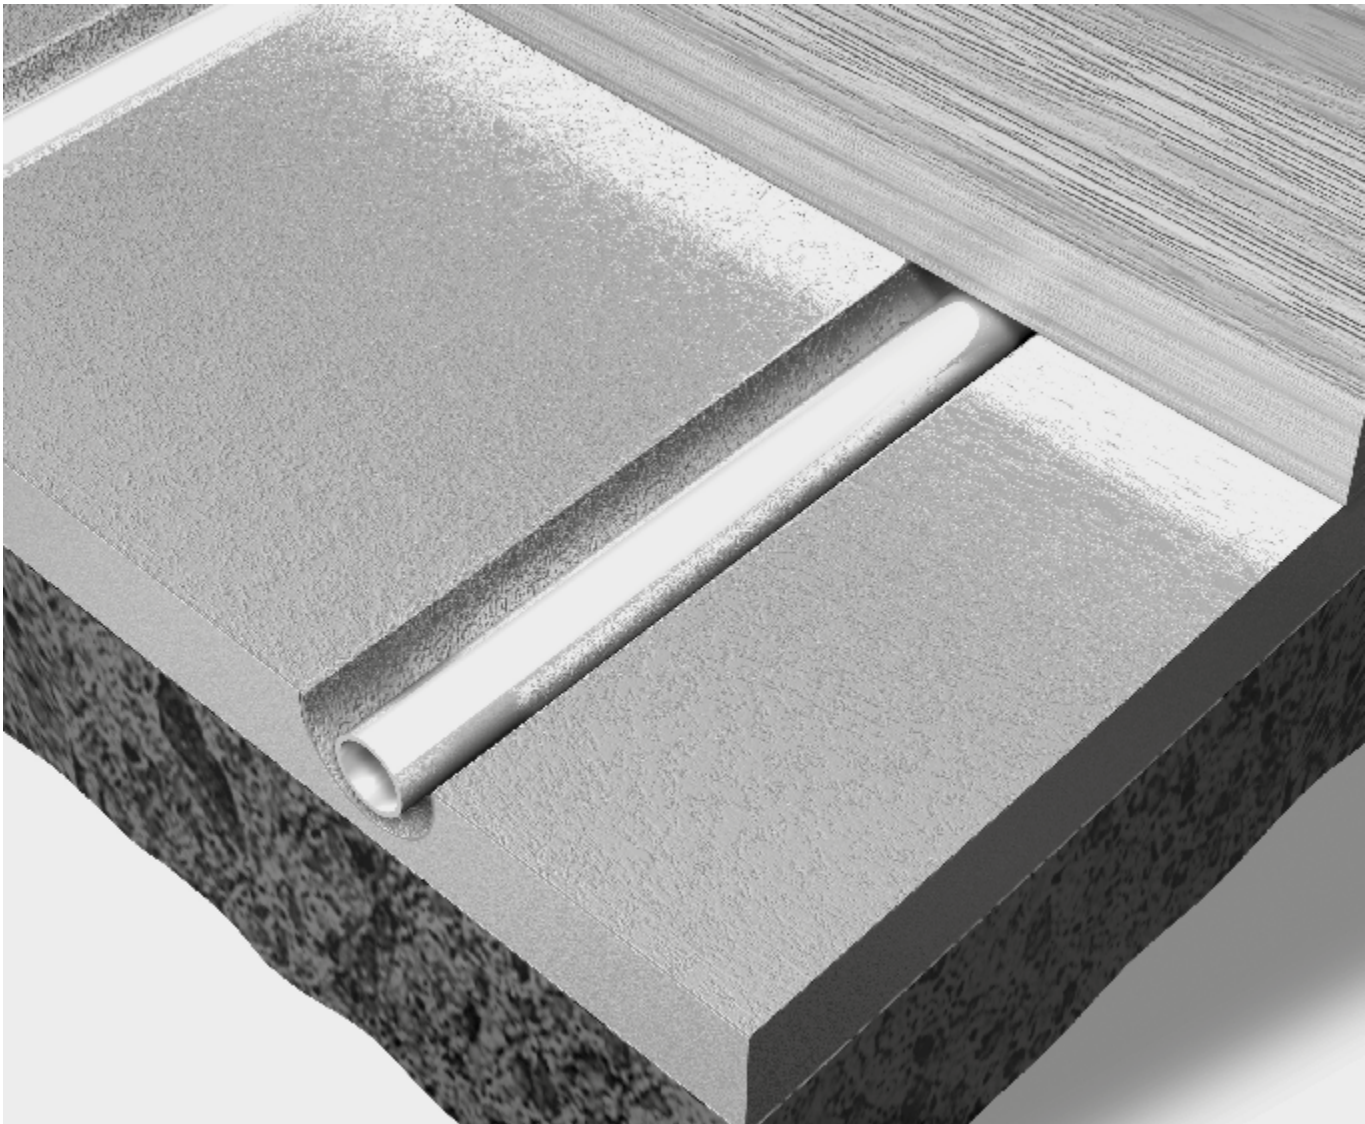


TPA17

Product

Aquafloor

Super Thin Floating Floor Underfloor Heating System

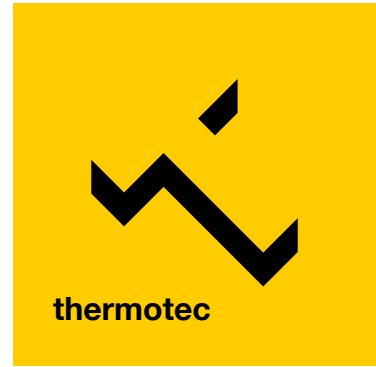

Contact

thermotec




Southpoint, Compass Park,
Bodiam, Robertsbridge
TN32 5BS

thermotecuk.com



Super Thin Floating Floor Underfloor Heating System

For overlay of Suspended or Solid Sub-floors

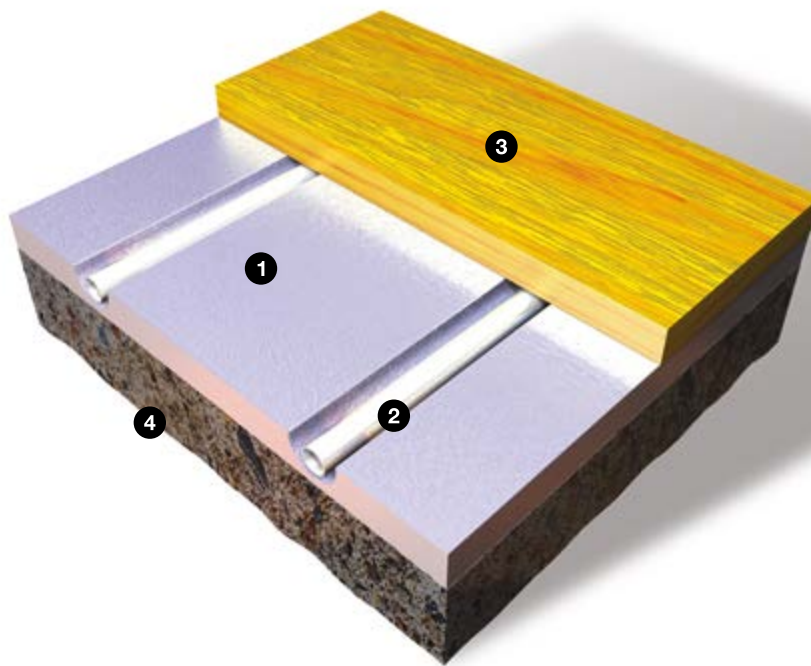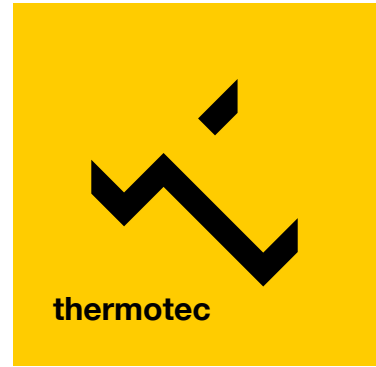

TYPICAL SECTION

- 1 Routed and foiled EPS insulation panel 150 KPA
- 2 Aquafloor 12mm PE-MDXc multilayer UHF pipe
- 3 Engineered timber floor finish or deck
- 4 Structural load bearing sub-floor

FEATURES AND BENEFITS

- Dry construction - no 'wet' screed
- Floor finishes can be applied immediately after installation
- Lightweight construction
- Ideal for refurbishment projects
- Typical heat outputs 50 - 80 w/m²
- Engineered timber floor can be laid directly over routed and foiled panel
- Overlay the UHF panel with ply or screed board for tiled or soft floor coverings
- Rapid UHF response times
- Improves sub-floor insulation

Heat output of up to 80watts/m²

Suitable for laying on solid and timber sub floors

Exceptionally fast to install

Minimal height build up

Individual temperature control in every room