

TP321

Project

The Warren
Kingswood
Plots 7, 16, 17 ,18, 19



thermotec



Contractors / Partners



Briar Mechanical Services Ltd.

TP327

Project

The Warren
Kingswood
Plots 7, 16, 17, 18, 19




Project Brief

In consultation with Briar Mechanical Services, Thermotec were asked to provide a complete design and installation scheme, in compliance with the latest environmental and technological heating systems.

Scope of Works

Thermotec delivered a fully integrated floor build up system from the sub-floor base to the final floor screed using our TPA11 Aquafloor Cliprail System and standard controls. The project was managed, installed and supervised by Thermotec, and was delivered on time and within budget.

Project Value: £3M

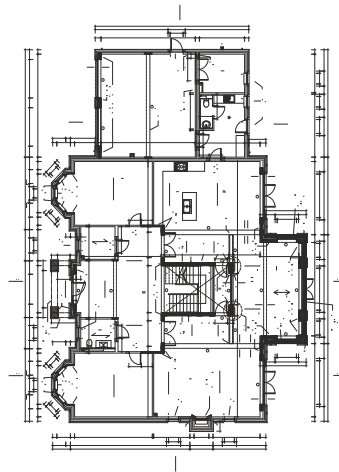


Project Details

Octagon develop prestigious homes, the Kingswood Development being an excellent example of high standard and design with UFH installed throughout each property.

2032m²



thermotec

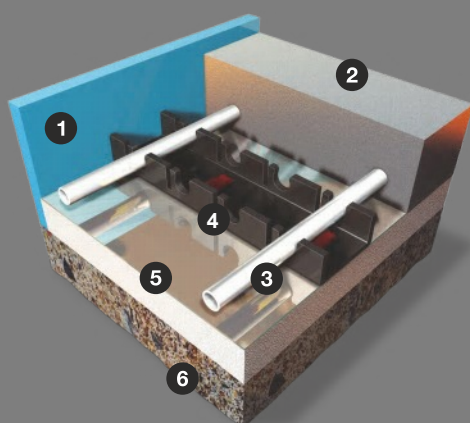

Aquafloor Installation

- 1 Expansion edging strip
- 2 Screed minimum 65mm
- 3 Aquafloor heating pipe
- 4 Heating pipe rail
- 5 Foil faced insulation min 25mm
- 6 Solid sub-floor



Unsurpassed in logistics
and project planning.
Assured quality installations
for the mechanical and
electric sector.

thermotecuk.com